

# E2xS121 Alarm Sounder/Horn

**The hazardous area E2xS121 alarm sounder is ATEX certified for Zone 2 applications and also UL approved for Class I Div 2 applications.**

With a maximum sound level output of 121dB(A) at 1 metre and a choice of 45 alarm tones and 3 remotely selectable stages the E2xS121 alarm sounder horn is suitable for all signalling applications with high ambient noise levels.

The E2x range features enclosures manufactured from lightweight, corrosion proof PPS and high impact, fire retardant ABS re-entrant flare horns; both of which are suitable for the harshest of environments.


## Features

- Automatic synchronisation on multi-sounder system.
- Very large termination area.
- Ratchet adjustable stainless steel 'U' bracket.

## Approvals

- ATEX certificate: DEMKO 06 ATEX 0421554, EN 50021: 1999
- UL File ref: E230764



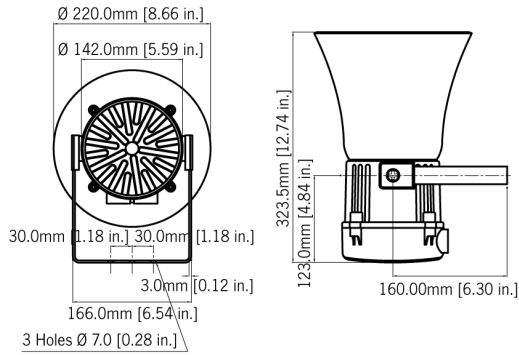

## Specification

Maximum output: 121dB(A) @ 1 metre [112dB(A) @ 10ft/3m]

Nominal output: 117dB(A) @ 1m +/- 3dB - Tone 2 [108dB(A) @ 10ft/3m]

No. of tones: 45 (UKOOA/PFEER compliant)

No. of stages: 3

Volume control: Max. 117dB(A); Min. 111dB(A) - Tone 2

Effective range: 200m/656ft @ 1KHz

Voltages DC: 24vdc (10-30vdc); 48vdc

Voltages AC: 115vac; 230vac

Ingress protection: ATEX: IP66 & IP67  
UL: Type 4, 4X & 13

Housing material: UL94V0 PPS & ABS

ATEX cable entries: 2 x M20 ISO cable gland entries - with 1 blanking plug.

UL cable entries: 1 x 1/2" NPT cable gland entry & 1 x M20 with blanking plug

Terminals: 0.5 to 2.5mm<sup>2</sup> - In & Out

Weight: DC: 2.75kg/6.05lbs AC: 3.25kg/7.15lbs

\*SPL data +/-3dB(A). Measured at optimum voltage.

## Part Codes

**Part Code:** **Classification:**

**ATEX version:**

E2xS12 1EG \*\* II 3G EEx nA nL IIC T4  
(Tamb -20°C to +55°C)

**UL version:**

E2xS12 1UL \*\* Class I, Div 2, Grps A,B,C,D T3C  
(160°C) at +55°C  
Class I, Div 2, Grps A,B,C,D T4  
(135°C) at +40°C  
Class II, Div 2, Grps F & G T6  
(85°C) at +55°C  
Class III, Div 1, T6 (85°C) at +55°C

\*\* = Voltage reference:

Options: 24DC, 48DC, 115AC, 230AC

## Current Consumption

Version:	Voltage:	Current:
24V dc	10-30vdc	280mA
48V dc	38-58vdc	215mA
115V ac	50/60Hz +/-10%	142mA
230V ac	50/60Hz +/-10%	76mA

### Tone table

<b>S 1</b>	<b>Description</b>	<b>S 2</b>	<b>S 3</b>	<b>S 1</b>	<b>Description</b>	<b>S 2</b>	<b>S 3</b>
T 1	340 Hz Continuous	T 2	T 5	T 33	745Hz @ 1Hz Intermittent	T 2	T 5
T 2	800/1000Hz @ 0.25 sec Alternating	T 17	T 5	T 34	1000 & 2000Hz @ 0.5 sec Alternating - Singapore	T 38	T 45
T 3	500/1200Hz @ 0.3Hz 0.5 sec Slow Whoop	T 2	T 5	T 35	420Hz @ 0.625 sec Australian Alert	T 36	T 5
T 4	800/1000Hz @ 1Hz Sweeping	T 6	T 5	T 36	500-1200Hz 3.75sec /0.25sec. Australian Evac.	T 35	T 5
T 5	2400Hz Continuous	T 3	T 20	T 37	1000Hz Continuous - PFEER Toxic Gas	T 9	T 45
T 6	2400/2900Hz @ 7Hz Sweeping	T 7	T 5	T 38	2000Hz Continuous	T 34	T 45
T 7	2400/2900Hz @ 1Hz Sweeping	T 10	T 5	T 39	800Hz 0.25sec on, 1 sec off Intermittent	T 23	T 17
T 8	500/1200/500Hz @ 0.3Hz Sweeping	T 2	T 5	T 40	544Hz (100mS)/440Hz (400mS) - NF S 32-001	T 31	T 27
T 9	1200/500Hz @ 1Hz - DIN / PFEER P.T.A.P.	T 15	T 2	T 41	Motor Siren - slow rise to 1200 Hz	T 2	T 5
T 10	2400/2900Hz @ 2Hz Alternating	T 7	T 5	T 42	Motor Siren - slow rise to 800 Hz	T 2	T 5
T 11	1000Hz @ 1Hz Intermittent	T 2	T 5	T 43	1200 Hz Continuous	T 2	T 5
T 12	800/1000Hz @ 0.875Hz Alternating	T 4	T 5	T 44	Motor Siren - slow rise to 2400 Hz	T 2	T 5
T 13	2400Hz @ 1Hz Intermittent	T 15	T 5	T 45	1KHz 1s on, 1s off Intermittent - PFEER Gen. ...	T 38	T 34
T 14	800Hz 0.25sec on, 1 sec off Intermittent	T 4	T 5				
T 15	800Hz Continuous	T 2	T 5				
T 16	660Hz 150mS on, 150mS off Intermittent	T 18	T 5				
T 17	544Hz (100mS)/440Hz (400mS) - NF S 32-001	T 2	T 27				
T 18	660Hz 1.8sec on, 1.8sec off Intermittent	T 2	T 5				
T 19	1.4KHz-1.6KHz 1s, 1.6KHz-1.4KHz 0.5s -NFC48265	T 2	T 5				
T 20	660Hz Continuous	T 2	T 5				
T 21	554Hz/440Hz @ 1Hz Alternating	T 2	T 5				
T 22	544Hz @ 0.875 sec. Intermittent	T 2	T 5				
T 23	800Hz @ 2 Hz Intermittent	T 6	T 5				
T 24	800/1000Hz @ 50Hz Sweeping	T 29	T 5				
T 25	2400/2900Hz @ 50Hz Sweeping	T 29	T 5				
T 26	Bell	T 2	T 15				
T 27	554Hz Continuous	T 26	T 5				
T 28	440Hz Continuous	T 2	T 5				
T 29	800/1000Hz @ 7Hz Sweeping	T 7	T 5				
T 30	300Hz Continuous	T 2	T 5				
T 31	660/1200Hz @ 1Hz Sweeping	T 26	T 5				
T 32	Two T chime.	T 26	T 15				